


Assembly and Installation Instructions

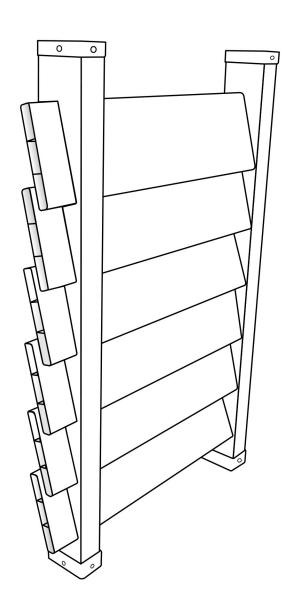

PLEASE READ INSTALLATION INSTRUCTIONS COMPLETELY BEFORE STARTING. *Installation Support Hotline 1-800-499-FENCE*

1-800-499-FENCE

Installation Support Hotline / www.DennisvilleFence.com

Thank you for purchasing Louvered Piling.

Please read installation instructions completely before beginning assembly.

IMPORTANT:

Before you begin...

Check Local Zoning Laws.

Zoning laws may restrict the location and height of your installation, permits may also be required.

• Underground Utilities.

Dial 811 and pay to have underground utility lines marked. Even at shallow depths utility lines can be present.


 Check that all tools and materials are present to properly assemble your Louvered Piling.


Louvered Piling Parts and Assembly

PLEASE TAKE A COMPLETE INVENTORY OF ALL PARTS PRIOR TO Beginning ASSEMBLY. DO NOT ATTEMPT TO ASSEMBLE IF PARTS ARE MISSING OR DAMAGED.

For replacement parts or assistance dial:

1-800-499-FENCE

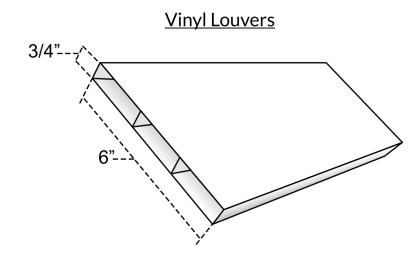

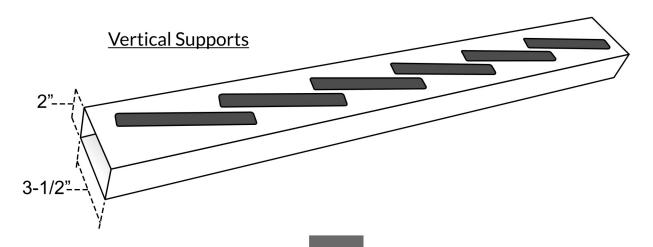

1-800-499-FENCE

LOUVERED PILING

Installation Support Hotline / www.DennisvilleFence.com

Assembly Instructions

1. Measure End to End and Deduct 1/2" From Opening.



Measure End to End and Deduct 1/2" From Opening


Optional: If Installing Louvered Piling On Top Of Dirt,
Dig Holes To Place The Supports Into.

2. Cut Horizontal Louvers to Necessary Length.

1-800-499-FENCE

Installation Support Hotline / www.DennisvilleFence.com

3. Drill 5/8" Hole On Inside Of Left End Support and Right End Support.

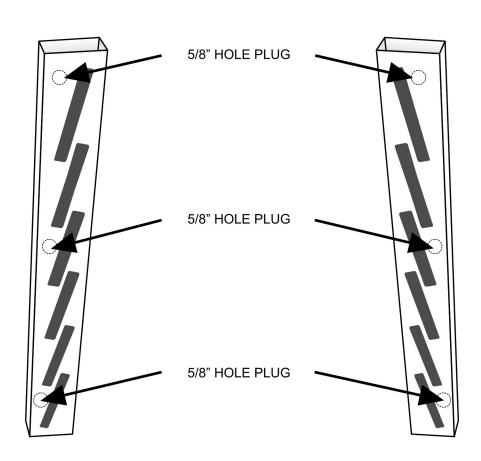


1-800-499-FENCE

LOUVERED PILING

Installation Support Hotline / www.DennisvilleFence.com


4. Assemble Louvered Wall Using Left End Support, In-Line Support If Needed* and Right End Support.

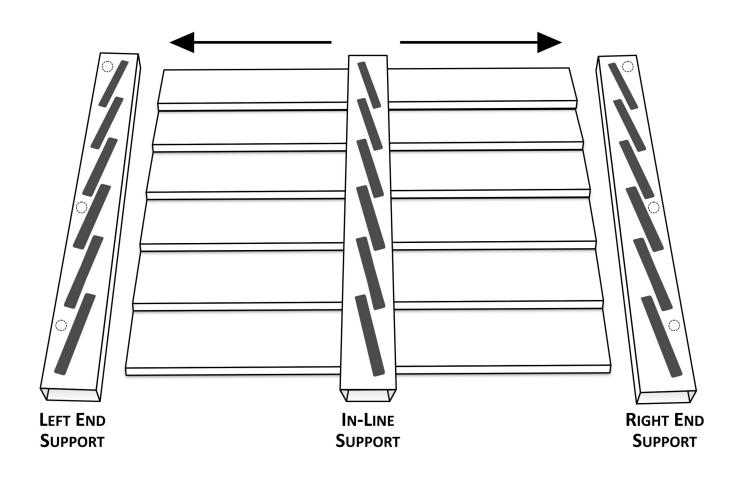

*Note: Spans Over 6Ft Require Placement Of An In-Line Support.
In-Line Supports Must Be Spaced At Least Every 6ft
For Optimal Structural Integrity.

Installation Support Hotline / www.DennisvilleFence.com


5. Insert Screws In Drilled Holes To Attach and Secure Louvered Piling Support To Existing Piling/Column. Place 5/8" Hole Plugs Into Hole.

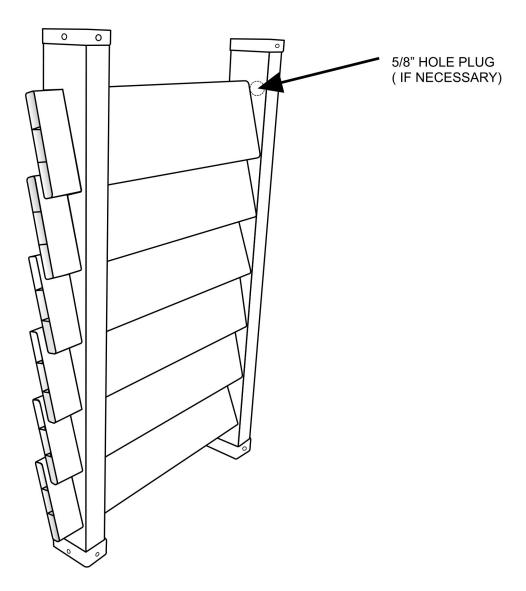

Optional: Secure Top Of Louvered Piling To Structure Using Rail Mount Brackets.

Installation Support Hotline / www.DennisvilleFence.com

Installation Example

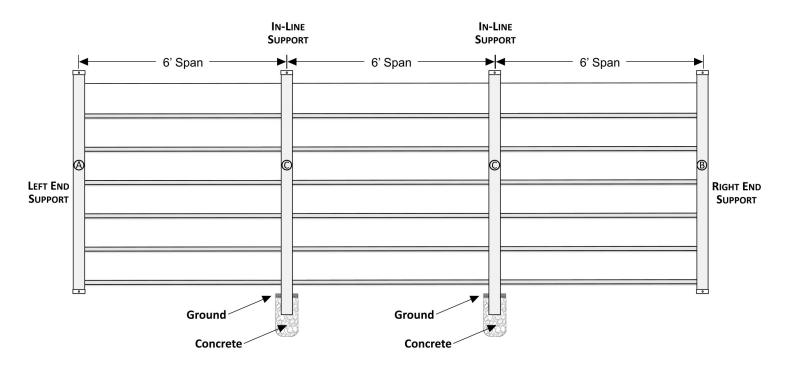

- **A** Left End Support
- **B** Right End Support
- © In-Line Support

